

PRIMARY

3 inch fusible fill cap, 2 inch pressure vacuum vent, standard breather vent, 3 x 1 1/4" feed. **Fitting Plate:** sockets, 3 x 1" return sockets, float level fuel gauge.

SECONDARY


Fitting Plate: Supplied with blank plate as standard, optional return & feed sockets available.

APPROVALS & CERTIFICATIONS			
Capacity (Liters)	2000	Outer Tank Thickness (mm)	3
Capacity (US Gallons)	528	Inner Tank Thickness (mm)	4
Length (mm/ft)	2525 / 8'3"	Weight, Tare (Kg/lb)	980 / 2160
Width (mm/ft)	1085 / 3'7"	Weight, Laden (Kg/lb)	2680 / 5908
Height (mm/ft)	1075 / 3'6"	Safe Fuel Fill Levels (Liters)	1900

*Calculations are based on safe fill levels at 95% total tank capacity & specific gravity of diesel as 0.9

COMPLETELY REMOVABLE INNER TANK

- 1: External Lid
- 2: Primary Hatch Cover Lid
- 3: Stacking Cover with Lifting Lugs
- 4: Primary Hatch Fittings Plate
- 5: Bracket for Dispensing Nozzle
- 6: Internal Steel Fuel Pipes
- 7: Pump Bracket System
- 8: Hose Reel Brackets
- 9: Forklift Access
- 10: Secondary Hatch Cover Lid
- 11: Secondary Hatch Fittings Plate (fittings optional extra)
- 12: Inner Primary Tank Lifting Lug
- 13: Inner Primary Tank
- 14: External Bund Tank
- 15: Skid Mounted Base Frame
- 16: Bi-Directional Forklift Pockets

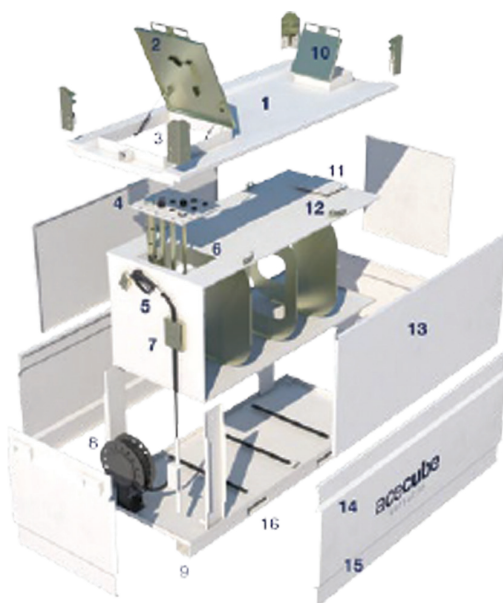

acecube

All Terrain

STANDARD

- Primary Hatch Plate
- Stacking Corner and Lifting Eye
- Universal Pump Bracket



OPTIONAL

- Retractable Hose Reels
- Dispensing Nozzles
- Electric Pumps

