

acecube

versatile



acecube
versatile

APPROVALS & CERTIFICATIONS

- Lifting when Empty ONLY
- PPG 2 & PPG 26
- BS799
- Patent Design (No. GB2502198)

Design Features

✓	Bi-directional forklift plates, internal baffle plates, galvanised hatch plates, stacking corners & lifting eyes to allow safe & easy handling
✓	Designed to stack inside shipping containers & across truck beds providing economical transportation
✓	Unique hexagonal corners for extra strength. Three letter box openings for secure & safe hose connections
✓	Large designed dispensing gun equipment compartment with fixed arrangements to carry hose reels, pumps, gun nozzles, cables, batteries & bund alarms
✓	110% bunded tank capacity - to meet the global environmental regulations
✓	Completely removable inner tank for easy maintenance & cleaning
✓	Primary & secondary hatch plates - for multiple use & versatility. The primary hatch plate acts as a man way
✓	The primary hatch plate is fitted with a 3 inch fill pipe, three - 1" return pipes & three - 1 1/4" feed pipes as standard for multiple use
✓	Space efficient design - easily stacked 2 high when full & 3 high when empty
✓	Unique pitched outer lid - designed to allow for dust & rain regress
✓	The primary hatch plate comes complete with a secure lockable design & and has beading around the lid closing position

Optional extra - Bespoke colours available



PRIMARY

3 inch fusible fill cap, 2 inch pressure vacuum vent, standard breather vent, 3 x 1 1/4" feed. **Fitting Plate:** sockets, 3 x 1" return sockets, float level fuel gauge.

SECONDARY


Fitting Plate: Supplied with blank plate as standard, optional return & feed sockets available.

APPROVALS & CERTIFICATIONS			
Capacity (Liters)	4500	Outer Tank Thickness (mm)	3
Capacity (US Gallons)	1188	Inner Tank Thickness (mm)	4
Length (mm/ft)	3020 / 9'1"	Weight, Tare (Kg/lb)	1910 / 4210
Width (mm/ft)	2020 / 6'7"	Weight, Laden (Kg/lb)	5960 / 13139
Height (mm/ft)	1075 / 3'6"	Safe Fuel Fill Levels (Liters)	4275

*Calculations are based on safe fill levels at 95% total tank capacity & specific gravity of diesel as 0.9

COMPLETELY REMOVABLE INNER TANK

- 1: External Lid
- 2: Primary Hatch Cover Lid
- 3: Stacking Cover with Lifting Lugs
- 4: Primary Hatch Fittings Plate
- 5: Bracket for Dispensing Nozzle
- 6: Internal Steel Fuel Pipes
- 7: Pump Bracket System
- 8: Hose Reel Brackets
- 9: Forklift Access
- 10: Secondary Hatch Cover Lid
- 11: Secondary Hatch Fittings Plate (fittings optional extra)
- 12: Inner Primary Tank Lifting Lug
- 13: Inner Primary Tank
- 14: External Bund Tank
- 15: Skid Mounted Base Frame
- 16: Bi-Directional Forklift Pockets

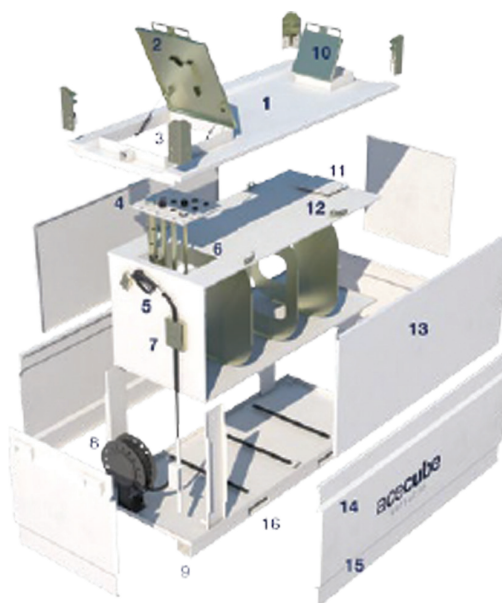

acecube

versatile

STANDARD

- Primary Hatch Plate
- Stacking Corner and Lifting Eye
- Universal Pump Bracket



OPTIONAL

- Retractable Hose Reels
- Dispensing Nozzles
- Electric Pumps

