Sustainable Site Solutions Garic Enviro Wheel Wash 24


Our Enviro Wheel Wash 24 is the ideal solution for demolition, quarrying and ground works sites where trucks, dumpers and lorries are regularly passing through heavy duty mud, dirt and debris.

Our fully automated and totally self-sufficient enviro wheel wash is perfect for sites where sticky clay and mud can be a big problem. As vehicles pass through the wheel wash, exceptionally powerful jets spray water onto the wheels, chassis and undersides, cleaning the vehicles without them even needing to stop. The wheel wash is environmentally friendly and utilises the latest water filtration technology combined with a 100 percent water recirculation system. It doesn't require an operative and is easy to maintain due to an innovative easy-clean water catchment area. Furthermore, it requires no electricity power source because it runs off a simple yet reliable 6" diesel pump.



Key Features:


- Powered heavy duty wheel wash
- Steel fabricated wash area
- Heavy duty lifting and lashing points
- Cleaning area with vertical spray jets
- Automatic sensors

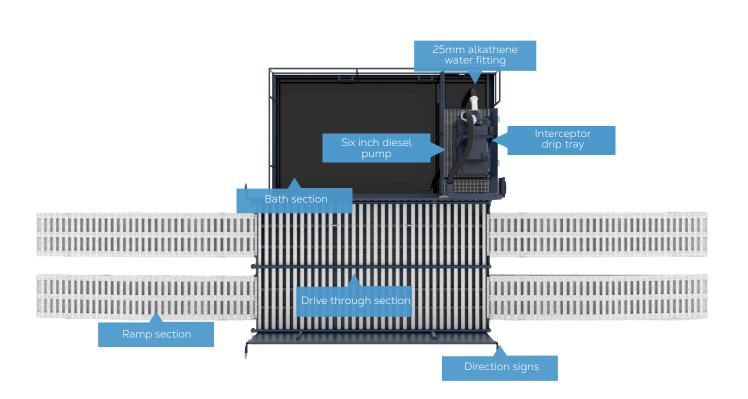

0330 094 8064 info@garic.co.uk

garic.co.uk

Sustainable Site Solutions Garic Enviro Wheel Wash 24

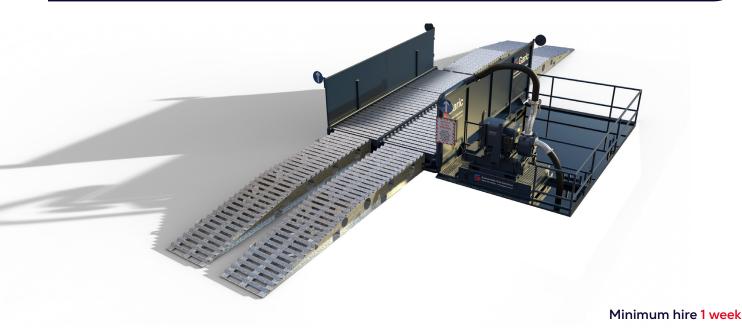

Standard Specifications:

Product code 300002 300001 - elevated

Dimensions (without ramps) LxWxH 22 x 24ft / 6.7 x 7.3m

Dimensions (with ramps) LxWxH 66 x 24ft / 20 x 7.3m Weight (without ramps) 8500Kg 9300Kg - elevated

Weight (with ramps) 11300Kg

Capacity of lagoon 2210G/10046L **Power type** 6" Diesel water pump

Steel fabricated wash area Included

Internal removable rumble road sections Included 25mm water inlet (c/w ball cock fitted)

Included
Heavy duty lifting/


lashing points

Automated magic eye system Included



Optional extra available

- Electric pumps
- Water Fills
- Header Tank / Bowser

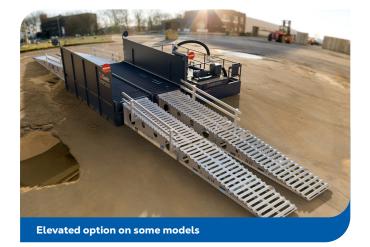

Previously named Enviro Wheel Wash & Elevated Enviro Wheel Wash



0330 094 8064 info@garic.co.uk

garic.co.uk

All data is based on Garic product specifications. If unavailable at the time of hire, an alternative specification model may be supplied.